

# Inspecting Stationary DOT Cylinders


Stationary DOT cylinders that are filled at the point of use must be inspected in accordance with NFPA 58 requirements.

NFPA 58 requires these cylinders to be visually inspected within 12 years of the date of manufacture and every 5 years thereafter.

Each inspection must be documented, and the cylinder must be marked with the month and year of the examination followed by the letter E (i.e., 10-26E).

## Do NOT Apply a RIN

NFPA 58 inspection requirements are different from DOT cylinder requalification requirements. Because these cylinders are being inspected under NFPA 58, they must not be marked with a Requalification Identification Number (RIN).

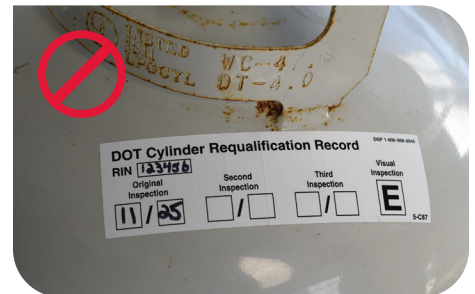

► For more information about requalifying DOT cylinders, see PERC's **Requalifying DOT Cylinders program** in The Learning Center at [training.propane.com](https://training.propane.com)

